



Cable / cable de termopar tipo K con dos trenzados trenzados tipo K PFA - hilo de 1/0,2 mm

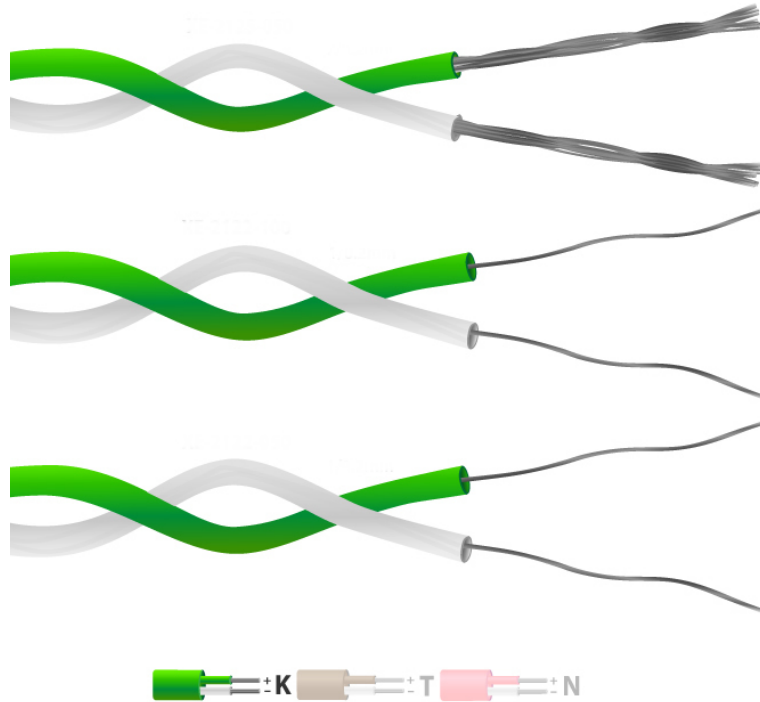


10m

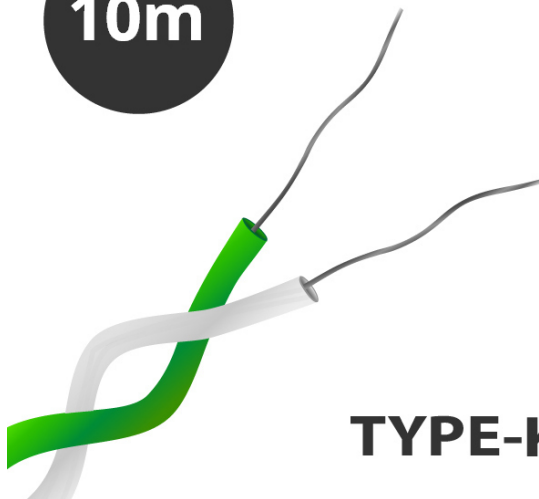

TYPE-K

25M

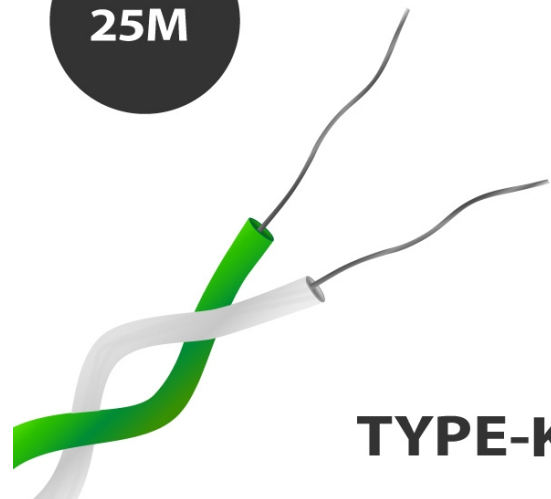

TYPE-K

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cable / Cable de termopar tipo K de par trenzado con dos trenzados aislados tipo K PFA (IEC)

Doble par trenzado de tefln PFA para extender o fabricar termopares simples. El teflnPFA tiene una buena resistencia y flexibilidad mecánica, resistente a aceites, ácidos y otros fluidos adversos, gases, vapor y presión.

Especificaciones
Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	5m, 10m, 25m, 50m, 100m, 200mm
Cable Type	Single pair of PFA insulated conductors twisted together
Core / Strands	1/0.2mm
Conductor Cross Section 1/0.2 (mm²)	0.032
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Teflon®
Loop Resistance 1/0.2 (Ohms per combined metre)	31.8
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1