


Cable / cable para termopar plano aislado tipo K PFA (IEC) - Hilo de 7/0,2 mm

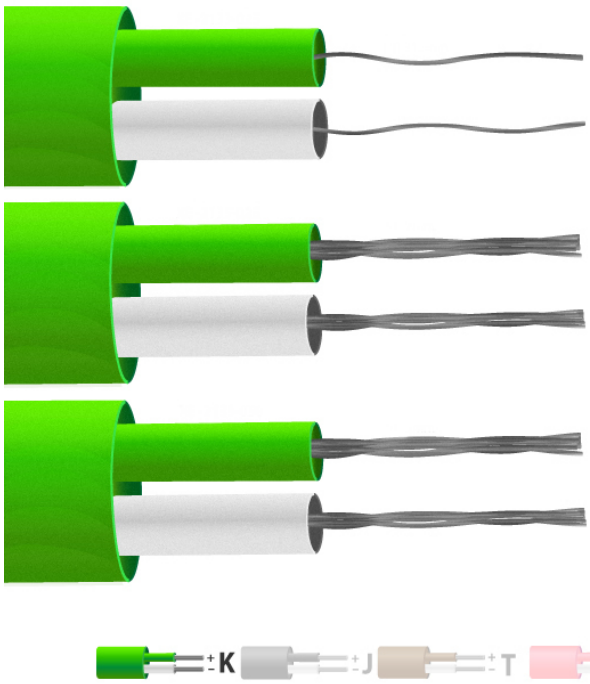

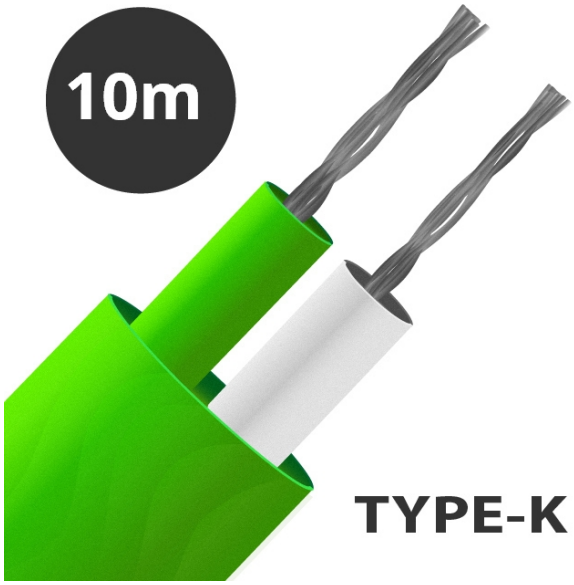

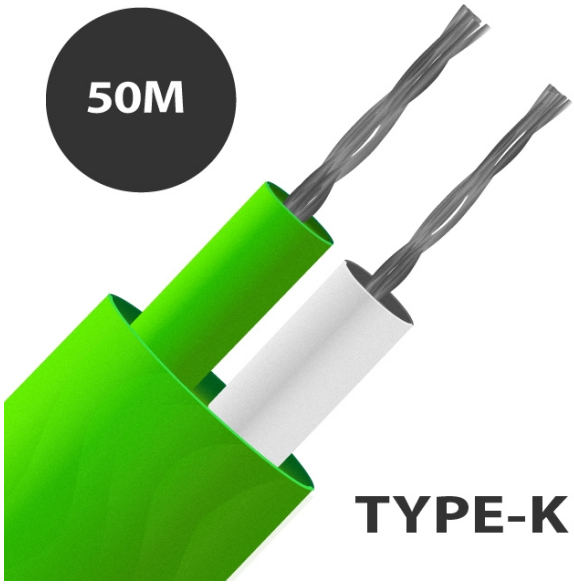

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Cable / cable termopar plano aislado tipo K PFA (IEC)

Par plano aislado con tefln PFA. El tefln PFA tiene buena resistencia mecnica y flexibilidad, resistente a aceites, cidos y otros fluidos, gases, vapor y presin adversos.

Compra directamente en Labfacility en longitudes de carrete de hasta 200 m
Para longitudes ms largas, puedes pedir bobinas de 300m y 500m a Farnell; haz clic en el logo de Farnell en la pgina del producto para ver las opciones de compra.

Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Single pair of PFA insulated conductors, laid flat with PFA jacket
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm2)	0.219
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C

+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1