


LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Extensiones de termopar de fibra de vidrio tipo J con enchufes y enchufes estndar (IEC)

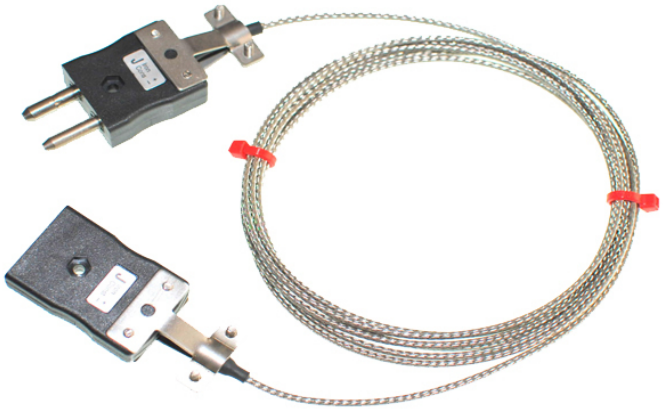

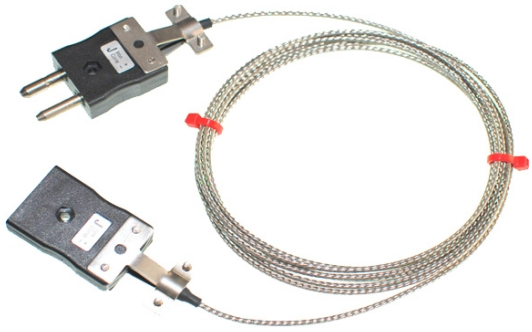

TYPE-J (IEC)

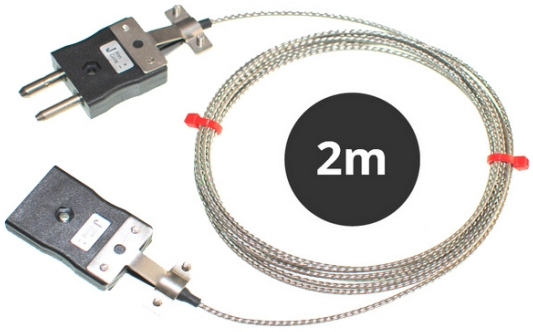

TYPE-J

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Descripcin del cable

Cable de extensin aislado de fibra de vidrio con trenzado de acero inoxidable

Termopar tipo J en longitudes de 2 o 5 metros

Conductores trenzados de 7/0,2 mm

Construccin de pares planos aislados con fibra de vidrio, conductores colocados planos, fibra de vidrio aislada con chaqueta de fibra de vidrio, silicona barnizada en todo el cuerpo + trenza de acero inoxidable para mayor proteccin y resistencia mecnica

Buena resistencia a la temperatura, pero no adecuada donde hay fluidos presentes

Abrazadera para cables instalada para asegurar el cable a los enchufes

Clase de tolerancia 2 a IEC-584

Clasificacin de aislamiento de -60C a 350C (periodos cortos de hasta 400C)

Cdigo de color (ncleos y funda) a IEC-584-3

Descripcin del conector

Todos los contactos estn polarizados para garantizar una conexin correcta

Abrazadera para cables disponible para asegurar el cable a los enchufes

Los contactos tipo J estn hechos de verdaderas aleaciones de termopar

Codificado por colores de acuerdo con la especificacin IEC

Temperatura mxima de funcionamiento continuo 220C

Specifications

General Description	Good strength to physical disturbance and high temperature (up to 400°C). Will not prevent ingress of fluids.
Cable Length	2M or 5M
Cable Type	Flat pair cable
Connector Type	Thermocouple Plugs & Sockets
Connector Size	Standard
Core / Strands	7/0.2mm

Conductor Cross Section 7/0.2 (mm2)	0.219
Outer Colour	Silver
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+350°C (short periods up to 400°C)
Min. Temperature	-60°C
+ Conductor	Iron
- Conductor	Constantan
Screen	Yes
Screen Type	Stainless Steel Overbraid
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	J
Tolerance	Class 2