


## Cable / cable de termopar plano tipo K PFA IEC - hilo de 1/0,508 mm

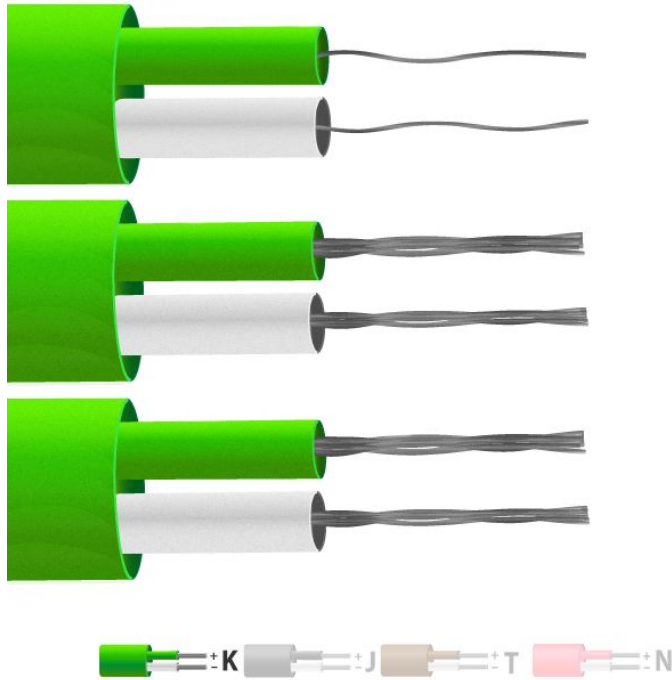

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cable/cable termopar plano aislado con PFA - Colocado plano, lado a lado y revestido con PFA. Clase de tolerancia  
 1

No encuentras lo que necesitas? Llama o enva un correo electronico a nuestro equipo tecnico de ventas al +44 (0) 1243 871 280 o sales@labfacility.com para recibir ayuda con la seleccion de productos y el soporte tecnico

## Specifications

<b>General Description</b>	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
<b>Cable Length</b>	10m, 25m, 50m, 100m, 200m
<b>Cable Type</b>	Single pair of PFA insulated conductors, laid flat with PFA jacket
<b>Core / Strands</b>	1/0.508mm
<b>Conductor Cross Section 1/0.508 (mm<sup>2</sup>)</b>	0.203
<b>Outer Colour</b>	Green
<b>+ Colour</b>	Green
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PFA Insulated
<b>Loop Resistance 1/0.508 (Ohms per combined metre)</b>	4.9
<b>Max. Temperature</b>	260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Nickel Chromium
<b>- Conductor</b>	Nickel Aluminium
<b>Screen</b>	No



# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	K
<b>Tolerance</b>	Class 1