


## Cable / cable termopar de par plano tipo T PTFE IEC - hilo de 7/0,2 mm

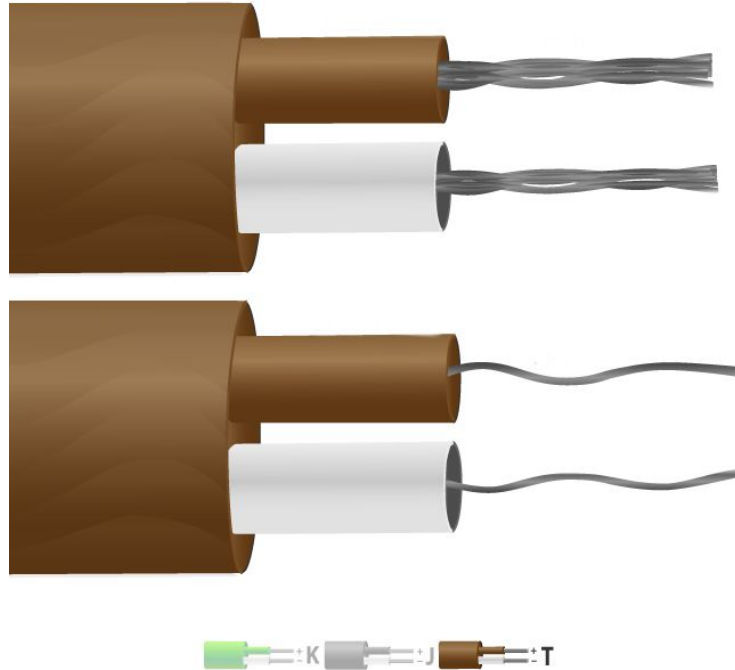

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cable / cable termopar plano aislado tipo T PTFE (IEC)

Un par plano aislado de PTFE. El PTFE tiene una buena resistencia y flexibilidad mecánica, resistente a aceites, ácidos y otros fluidos adversos.

### Especificaciones

## Specifications

<b>General Description</b>	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
<b>Cable Length</b>	10m, 25m, 50m, 100m, 200m
<b>Cable Type</b>	Flat pair cable
<b>Core / Strands</b>	7/0.2mm
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>Outer Colour</b>	Brown
<b>+ Colour</b>	Brown
<b>- Colour</b>	White
<b>Drain Wire</b>	No
<b>Insulation Material</b>	PTFE Insulated
<b>Loop Resistance 7/0.2 (Ohms per combined metre)</b>	2.3
<b>Max. Temperature</b>	260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Copper
<b>- Conductor</b>	Constantan



# LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	T
<b>Tolerance</b>	Class 1