

Cable / cable termopar plano aislado con PVC tipo K (IEC) - 7/0,2 mm



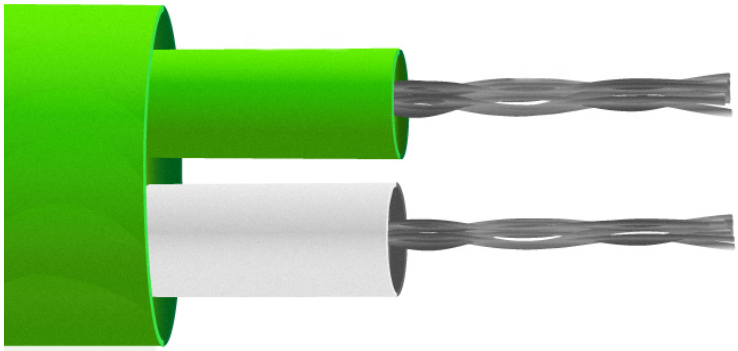

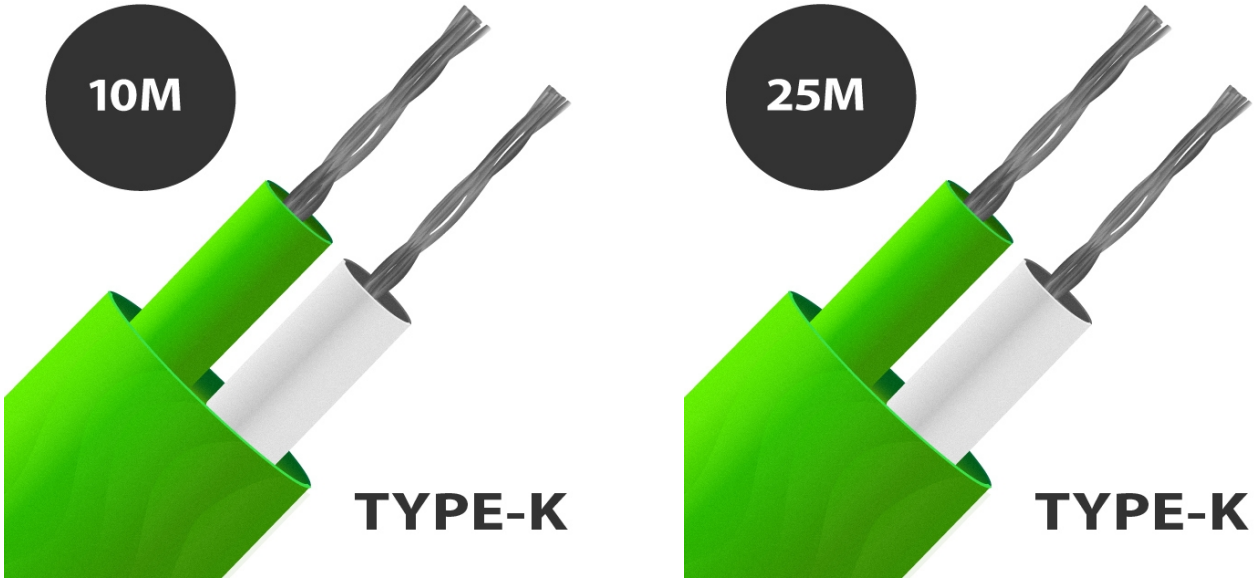

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Cable / Cable de Termopar (IEC) Tipo K Tipo K Aislamiento PVC de Par Plano

El cable compensador se asemeja a la caracterstica termoelctrica del termopar correspondiente en un rango limitado de temperatura ambiente, tpicamente de 0 a 80C. Dado que estos cables estn fabricados con materiales de bajo coste, se pueden lograr ahorros en instalaciones de planta en comparacin con el uso de cable de extensin termopar real.

Compra directamente en Labfacility en longitudes de carrete de hasta 200 m
Para longitudes ms largas, puedes pedir bobinas de 300m y 500m a Farnell; haz clic en el logo de Farnell en la pgina del producto para ver las opciones de compra.

Specifications

General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	10, 25, 50, 100 or 200m
Cable Type	Flat pair construction
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm2)	0.219
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PVC Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+105°C

Min. Temperature	-10°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 2