
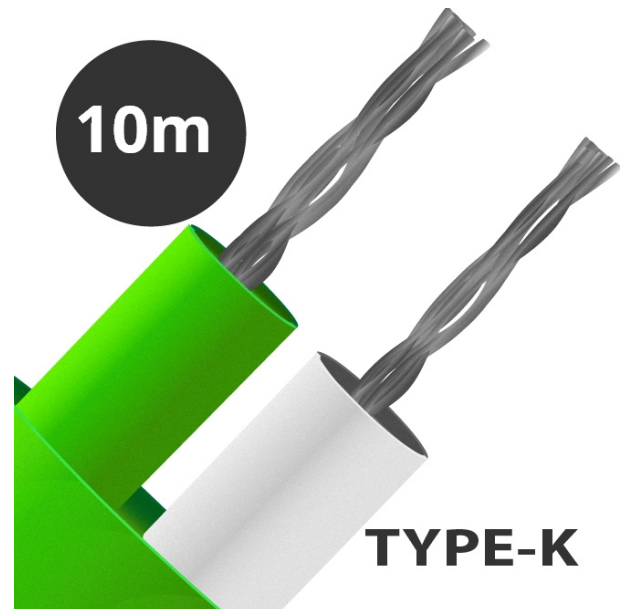
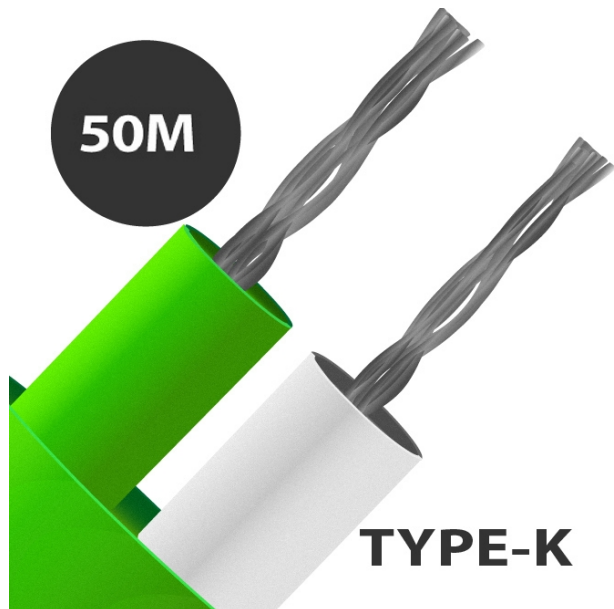


Cable / cable termopar plano aislado tipo K PTFE (IEC) - hilo de 7/0,2 mm

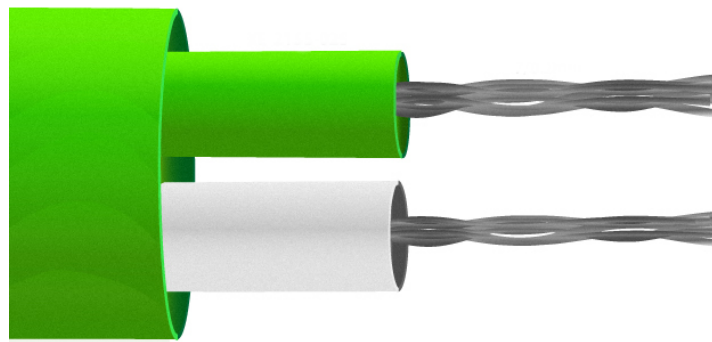

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cable / cable termopar plano aislado tipo K PTFE (IEC)

Un par plano aislado de PTFE. El PTFE tiene una buena resistencia y flexibilidad mecánica, resistente a aceites, cidos y otros fluidos adversos.

Especificaciones
Specifications

General Description	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Flat pair cable
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PTFE insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C



+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1