


Cable / cable termopar tipo K de PTFE aislado de dos pares trenzados (IEC) - hilo de 1/0,315 mm

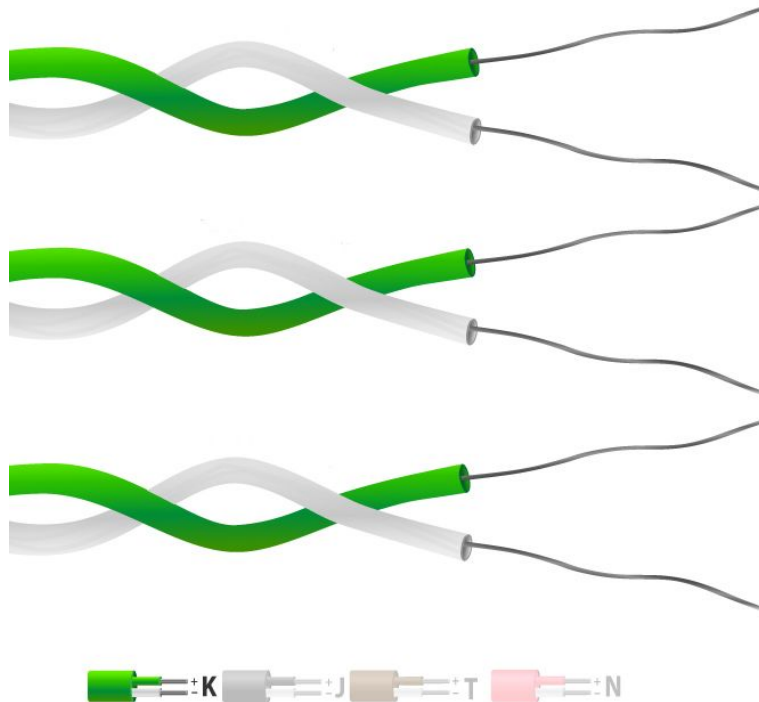

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Cable / Cable de termopar tipo K de par trenzado con aislamiento doble (IEC)

Doble par trenzado aislante de PTFE. El PTFE tiene una buena resistencia y flexibilidad mecánica, resistente a aceites, ácidos y otros fluidos adversos.

Especificaciones

Specifications

General Description	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Twin twisted pair for extending or making simple thermocouples
Core / Strands	1/0.315mm
Conductor Cross Section 1/0.315 (mm²)	0.078
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PTFE insulated
Loop Resistance 1/0.315 (Ohms per combined metre)	12.8
Max. Temperature	260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1